




HALLEY CABLES

NHXCH FE180 E30

Halogen free, fire resistant power cable, with concentric conductor, insulation integrity FE180 and circuit integrity E30, 0.6/1 kV.

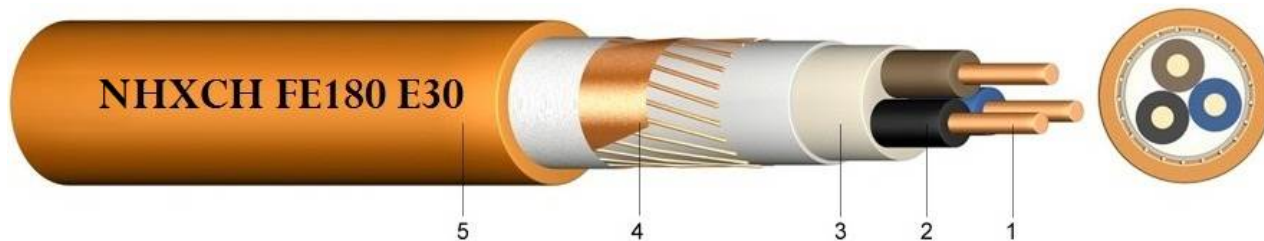

Construction:

- | | |
|-------------------------|---|
| 1. Conductor | : bare copper, solid or stranded. |
| 2. Insulation | : core insulation of halogen-free, similar ceramic polymer compound, according to HD 308. |
| 3. Inner covering | : halogen-free compound. |
| 4. Concentric conductor | : copper wires with counter helix of copper tape. |
| 5. Outer sheath | : halogen-free, polymer compound, orange. |

Properties:

- Halogen free.
- Fire resistant.
- Low smoke.
- No emission of corrosive gases.

Technical data and tests:

- | | |
|-----------------------------------|---------------------|
| Nominal voltage U ₀ /U | : 600/1000 Volt. |
| Service temperature | : -30° C... +90° C. |
| Bending radius | : 12 x diameter. |
| Laying temperature | : -5° C... +90° C. |

Standards:

- | | |
|--|--------------------------------|
| Cable standard | : DIN VDE 0266. |
| Halogen free, no emission of corrosive gases | : EN 50267-2-2, IEC 60754-2. |
| Low smoke generation | : EN 61034. |
| Fire retardant | : EN 60332-1-2, EN 60332-3-24. |
| Insulation integrity FE 180 | : DIN VDE 0472-814. |
| Circuit integrity E 30 | : DIN 4102 Part 12. |

Applications:

These flexible halogen-free cables main properties are being fire proof and halogen free which on the basis of a fixed operating mode, can continue with the supply of power under fire. These cables are used as energy, utility and lighting cables in dry, moist and wet rooms, for permanent installation above, on, in and beneath plaster and also for outdoor applications where lots of human life and material assets need to be protected in industrial constructions, schools, hospitals, shopping and cultural centers, energy plants, airports, metros. However, laying in a pipe is allowed if water accumulations are excluded. During installation the cables have to be protected from any external influences or mechanical damages. In case of fire, these cables inhibit the propagation of the flames whereby the development of smoke is extremely low. They may not be installed directly into the ground and into the water.



www.halleycables.com

NHXCH FE180 E30



HALLEY CABLES

NHXCH FE180 E30

Halogen free, fire resistant power cable, with concentric conductor, insulation integrity FE180 and circuit integrity E30, 0.6/1 kV.

www.halleycables.com

DIMENSIONS

Number of cores and nominal cross section mm ²	Overall diameter appr. mm	Weight appr. kg / km	Calorific potential kWh / m
2 x 1,5 RE/1,5	11,0	136	0,41
2 x 2,5 RE/2,5	12,2	174	0,47
2 x 4 RE/4	13,2	229	0,53
2 x 6 RE/6	15,0	301	0,62
2 x 10 RE/10	17,8	448	0,78
3 x 1,5 RE/1,5	11,4	169	0,51
3 x 2,5 RE/2,5	12,7	223	0,60
3 x 4 RE/4	13,8	297	0,68
3 x 6 RE/6	15,7	396	0,83
3 x 10 RE/10	18,6	599	10,8
3 x 16 RM/16	20,8	880	13,0
3 x 25 RM/16	23,4	1.191	15,8
3 x 35 RM/16	26,0	1.514	18,7
3 x 50 RM/25	29,6	2.032	23,2
3 x 70 RM/35	34,5	2.847	30,9
3 x 95 RM/50	39,0	3.832	37,7
3 x 120RM/70	43,1	4.841	45,4
3 x 150 RM/70	47,4	5.819	56,6
3 x 185 RM/95	53,1	7.384	70,1
3 x 240 RM/120	58,9	9450	85,3
4 x 1,5 RE/1,5	12,1	195	0,56
4 x 2,5 RE/2,5	13,5	260	0,66
4 x 4 RE/4	14,7	349	0,75
4 x 6 RE/6	16,8	469	0,91
4 x 10 RE/10	20,0	717	1,20
4 x 16 RM/16	22,5	1.067	1,44
4 x 25 RM/16	25,4	1.470	1,74
4 x 35 RM/16	28,2	1.874	2,01
4 x 50 RM/25	32,4	2.533	2,55
4 x 70 RM/35	37,8	3.559	3,42
4 x 95 RM/50	42,7	4.806	4,14
4 x 120 RM/70	47,4	6.074	5,07
4 x 150 RM/70	51,9	7.312	6,22
4 x 185 RM/95	58,4	9.289	7,83
4 x 240 RM/120	64,8	11.913	9,49
5 x 1,5 RE/1,5	13,0	215	0,58
5 x 2,5 RE/2,5	14,5	287	0,67
5 x 4 RE/4	15,8	391	0,76
5 x 6 RE/6	18,1	528	0,91
5 x 10 RE/10	21,6	812	1,17
7 x 1,5 RE/2,5	14,4	274	0,69
7 x 2,5 RE/2,5	15,6	352	0,79
12 x 1,5 RE/2,5	17,6	401	0,97
12 x 2,5 RE/4	19,3	546	1,11
24 x 1,5 RE/6	23,4	718	1,55
24 x 2,5 RE/10	25,8	1.006	1,79
30 x 1,5 RE/6	24,5	845	1,77
30 x 2,5 RE/10	27,1	1.193	2,06

RE= Round conductor, Single wire.
RM=Round conductor, Multi wire.

Any other sizes available on request.



NHXCH FE180 E30