




## Construction:

1. Central gel-filled tube.
  2. Optical fibres.
  3. Glass tensile elements.
  4. Water swellable elements.
  5. LSZH sheath.\*
- Sheath colour is black.

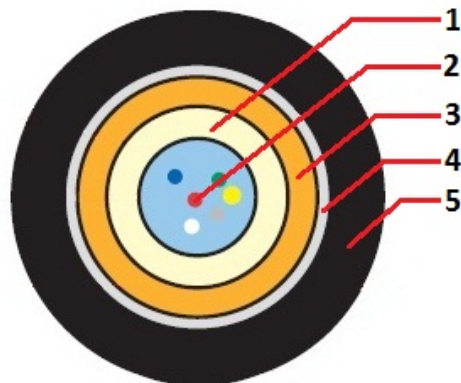

## Properties:

- Halogen free.
- Low smoke generation.
- No emission of corrosive gases.

## Technical data and tests:

- Standard : VDE 0888-114.
- Low smoke generation : IEC 61034-1/-2, EN 50268-1/-2.
- Flame retardant : EN 50266-2-4, EN 60332-1, IEC 60332-3-24, EN 50265-1.
- No emission of corrosive gases : IEC 60754-2, EN 50267-2-3.

## Applications:

Indoor/Outdoor fibre optic cable for ducts and trays applications.

DIMENSIONS						
Number of fibres	Number of tubes	Number of fibres/tube	Outer diameter mm	Cable weight kg/km	Calorific potential Mj/m	Calorific potential kWh/m
12	1	12	7,5	62	1,1	0,31

Any other sizes available on request.

\*Halogen free, flame retardant.

